

**LINDNER**



**KOMET 1800 | 2200 | 2800  
STATIONARY SECONDARY SHREDDING**

**UNBELIEVABLY  
PRECISE.**



ONLY LINDNER CLIENTS CAN TRULY SAY:

# THAT'S HOW DEFINED PARTICLE SIZE WORKS.

## PRECISION THAT'S A CUT ABOVE THE REST.

The Lindner Komet sets new standards in single-shaft shredding. Whether you are processing municipal or bulky refuse, industrial or commercial waste, textiles, waste paper or other materials – the Komet ensures smooth processes 24/7 thanks to its robust design, high-precision tools and smart features. Benefit from its first-rate particle quality and superb efficiency.



### 1. HYDRAULIC MAINTENANCE DOOR

**Remove non-shreddables quickly and cleanly** with the maintenance door at position 2.

**100% safe operation** with the mechanical safety lock and the pusher's special parking position.

**Enjoy comfortable maintenance access** to the cutting chamber with the maintenance door at position 3.



### 2. SINGLE-STEP BELT DRIVE

**Efficient, stable and gearless** belt drive.

**Low maintenance** with simple, tried-and-tested design.

**Readily available** and easily exchangeable standard parts.




### 3. TORQUE-LIMITING SAFETY CLUTCH

**Perfect drive protection** thanks to the drive unit's lightning-speed disengagement.

**Fully adjustable** to your materials.

**Secure power down** with our proven sensors.

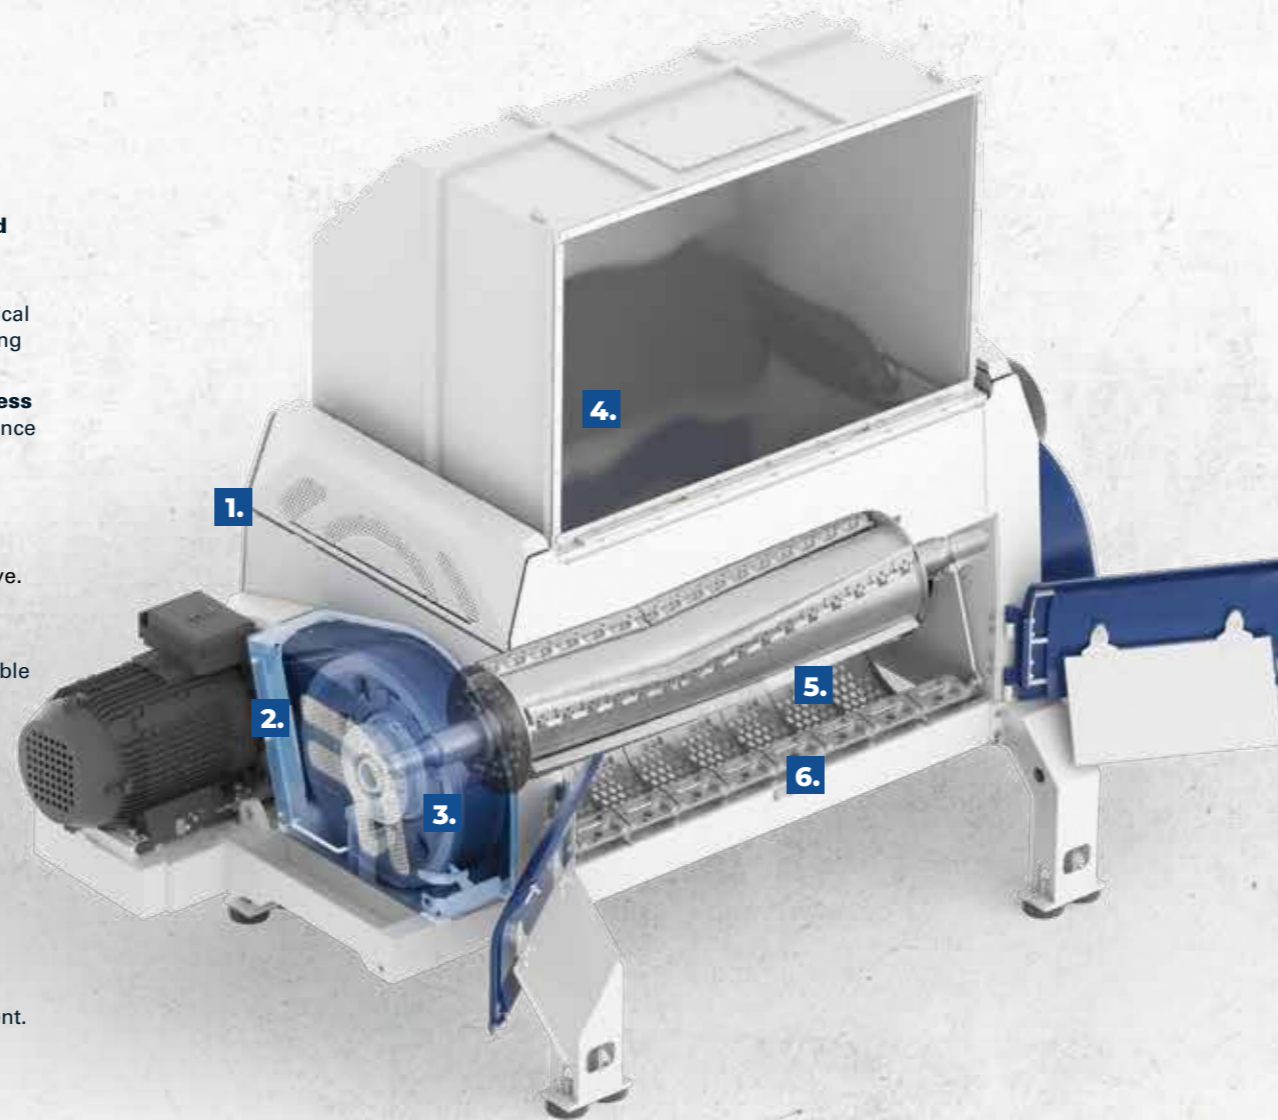

### 4. INTERNAL PUSHER

**Continuous shredding** due to smooth rotor feeding.

**Easy feeding** with a completely internal construction.

**Maintenance-free** thanks to the absence of guide elements.



### 5. HIGH-PRECISION SHEAR CUTTING SYSTEM

**High output** guaranteed with signature cutter geometry.

**Consistent particle size** – cutting gap fully adjustable even during operation.

**Parts storage made easy** thanks to identical cutters, counter knives and scrapers.

**Maximum service life** ensured by four-fold usable, quick-change cutters.



### 6. PLUG & GO SCREEN UNIT




**Flexible output sizes** made possible with quick-change screen units in various mesh widths.

**Easy access for maintenance and fitting** thanks to the swivel-mounted, hydraulically operated design.

**Extremely safe operation** with the electromagnetically locked screen access point, preventing access to the cutting chamber while the machine is in operation.



# TECHNICAL DATA

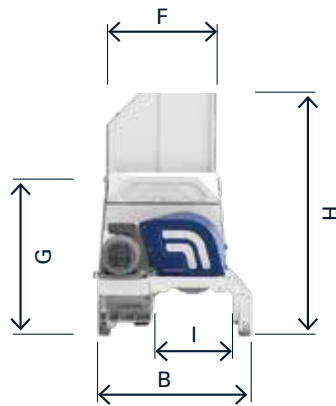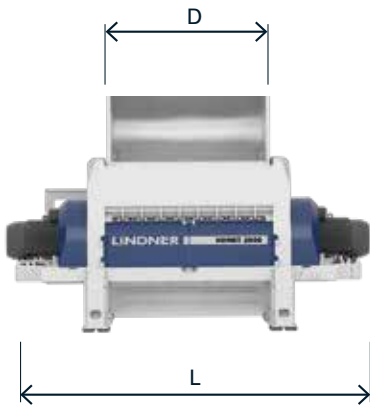

Hydraulic door for maintenance and removal of foreign objects

1. Operating position
2. Position for removal of foreign objects
3. Position for maintenance

		KOMET 1800	KOMET 2200	KOMET 2800
<b>DIMENSIONS*</b>				
Measure (LxBxH)	mm	4924 x 2925 x 3111	5755 x 2925 x 3111	6445 x 2925 x 3111
Filling opening (DxF)	mm	1790 x 2030	2135 x 2030	2825 x 2030
Cutting zone volumes	m <sup>3</sup>	3,3	4	5,3
Outlet width (I)	mm	960	960	960
Total weight	kg	18500	22500	26000
<b>CUTTING UNIT*</b>				
Rotor length	mm	1770	2115	2805
Rotor speed	min <sup>-1</sup>	355	355	355
Standard tool		Blade knives 172R	Blade knives 172R	Blade knives 172R
Number of knives	pcs.	50	60	80
Screens		hexagonal / round-shaped		
Number of screens	pcs.	5	6	8
End grain size	mm	15 - 100	15 - 100	15 - 100
<b>DRIVE UNIT*</b>				
Type		1-step belt drive	1-step belt drive	1-step belt drive
Motor	kW	1 x 200	2 x 132	2 x 160
Power Control		frequency converter		

\*The stated values refer to standard machine versions with a standard hopper and raised feet. The right to make technical changes is reserved.



Atex-explosion protection



Bus connection to the external control system



Fire extinguishing system with spark detection



Rotor Cooling System

## Lindner-Recyclingtech GmbH

Villacher Straße 48 | 9800 Spittal/Drau | Austria  
t.: +43 4762 2742 | f.: +43 4762 2742-9032 | office@l-rt.com

[www.l-rt.com](http://www.l-rt.com)